




正视图

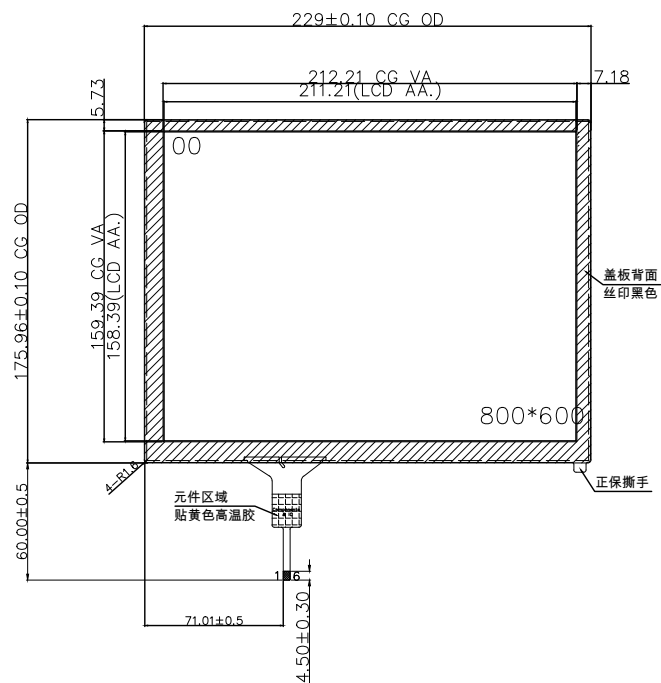

侧视图

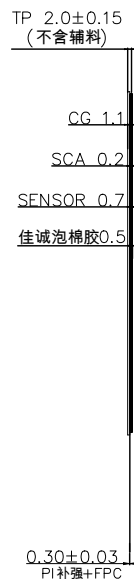

背视图

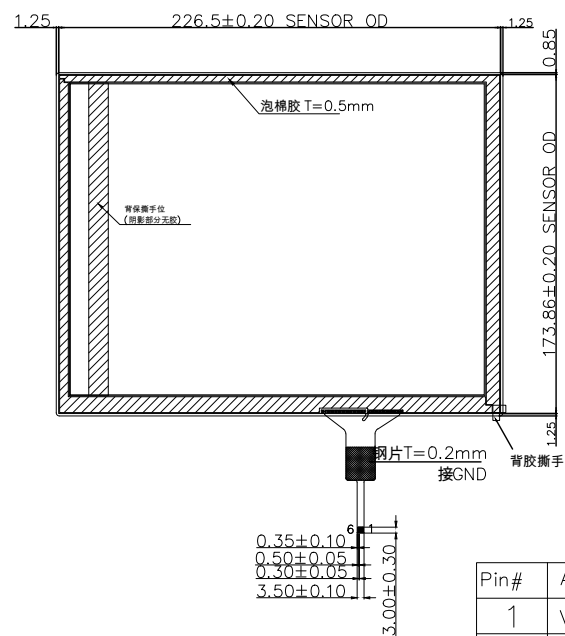

Pin#	Assignment
1	VDD_3.3V
2	SDA 2.8V
3	SCL 2.8V
4	INT
5	RST
6	GND

Notes:

- G+G: Cover Glass+SCA+ITO GLASS+FPC, Cover Glass:1.1MM, SCA:.20mm, ITO GLASS:0.70mm, Total Thickness:2.0±0.15mm(exclude foam and TFT)
- TP Type :GT9271(COF), Supply Voltage : 3.3V ,IO Voltage :3.3V; Numbers of Channel : 20*27
- Transmittance : ≥85%; TP Resolution : X:800,Y:600 ; Coordinate Orign :Upper Left Corner
- Operating Temperture : -20°C~+70°C, ≤90%RH; Storage Temperature : -30°C~+80°C, ≤90%RH
- Hardness of Cover Lens : ≥6H (750gf/Pencil Hardness Grade)
- Cover Glass Material :Glass (AGC)
- Tolerance : ±0.2mm

Victronix Tecenstar INT'L Co., LTD							
DRAWN BY:	Solon	2025-02-22	TITLE ID:	CTP-VX104B5747-GG	UNITS?	MM	
CHECKED BY:			CUSTOMER ID?		SCALE:	1:1	
APPROVED BY:			VEISION ID?	Ver.1	PAGE :	1/1	